



## BASE

Our BASE series is designed to offer the highest reliability at an outstanding price performance ratio. Due to the speed control, the compressor adapts to your needs and always works

with the greatest possible efficiency. In addition the BASE series is easy to maintain due to its design.

## BASE TD

As a TD version, with refrigerant dryer, filters and compressor mounted on the receiver, you only need a power supply and the connection into the compressed air network. The compressor is immediately ready for use.



BASE VSD 7 TD

# BASE VSD 7-15


## Technical data sheet BASE VSD 7-15

Model	Nominal capacity	Volume flow	Dimensions			Weight	Sound level
			Length	Width	Height		
	[kW]	[m <sup>3</sup> /min]	[mm]	[mm]	[mm]	[kg]	[dB(A)]
BASE VSD 7	7.5	0.87	880	660	900	160	62 +/-2
BASE VSD 11	11	1.49	1100	730	1050	250	62 +/-2
BASE VSD 15	15	2.00	1100	730	1050	270	65 +/-2
BASE VSD 7 TD	7.5	0.87	1855	780	1555	360	62 +/-2
BASE VSD 11 TD	11	1.49	1944	905	1533	480	62 +/-2
BASE VSD 15 TD	15	2.00	1944	905	1533	500	65 +/-2

Technical changes and mistakes reserved



Controller SCC-C100

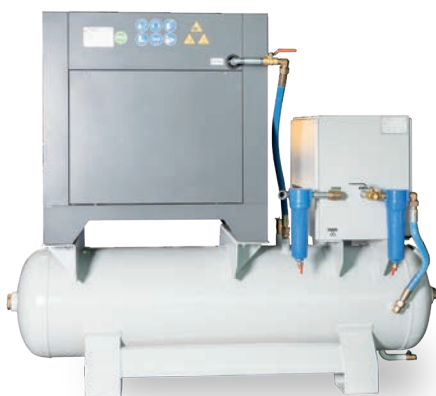

Rear of BASE VSD 7 TD

### Advantages of the BASE compressor series:

- Directly driven compressor stage for high economic efficiency
- Permanent magnet motor (IE4) for excellent efficiency
- Speed control to adapt to actual consumption
- Modern, advanced touch screen control
- Low noise levels
- Robust, durable construction for a long service life
- As TD with attached refrigeration dryer and pre or post filters

compressoren.nu

Compressoren.nu  
Dobbeweg 3B  
2254 AG Voorschoten

+31 (0)71 20 600 90  
info@compressoren.nu